

DOOR THRESHOLD
SYSTEM ACCESSORIES

UNLIMITED MOBILITY


GUTMANN WESER ZERO


The trend to barrier-free door thresholds is unstoppable. Apart from the issue of the ageing population and the desire to keep living at home for as long and as comfortably as possible, the barrier-free door thresholds are now simply a comfort issue. Doors, lifting/sliding doors and balcony doors should be passable, not to mention the major obstacles for children, older people, especially for wheelchair users.

For public buildings as well as for barrier-free apartments there is a strong demand to avoid lower door stops.

With the new threshold GUTMANN WESER ZERO the picture of seeing people „stumbling“ belongs to the past. The combination of a high-quality lowering seal system has achieved an optimum tightness. The threshold system is available in comfortable easy-to-use sets. Each set also includes all the necessary accessories. The WESER ZERO is infinitely variable.

- › 100% barrier-free.
- › Proven water tightness (300 Pascal / 7A).
- › Easy-to-use sets.
- › 3 different standard lengths, individual to cut.
- › For 78 mm and 88 mm wood thickness.
- › Also for outwards opening doors.
- › Renovation and new construction.

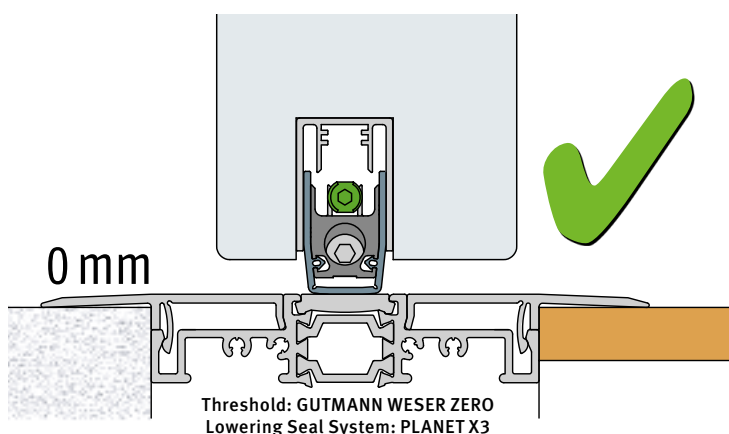

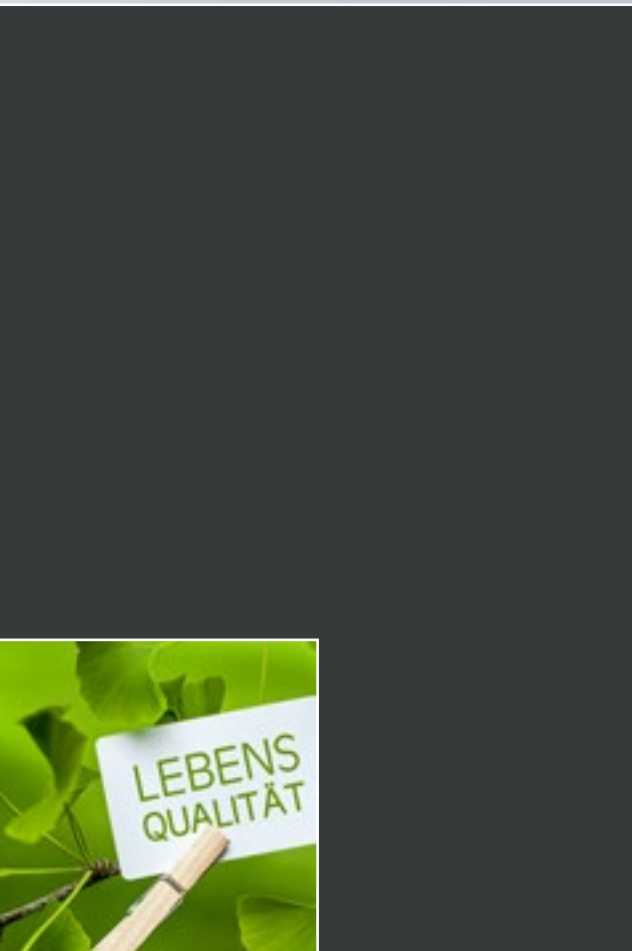

DOOR THRESHOLDS
SYSTEM ACCESSORIES

GUTMANN STANDARD THRESHOLDS

OPTIMAL PROTECTION AGAINST WATER AND COLD

The extensive GUTMANN door threshold range offers installation-friendly, high-performance and inexpensive solutions for all front and balcony doors. This project range is rounded out with a matching accessory range.

GUTMANN WESER 32 TI

- › Height 32 mm.
- › High quality plastic thermal separation ensures the highest thermal insulation value.
- › Reduces indoor condensation.
- › Ensures an extremely high water tightness (600 Pascal).
- › Usable in both new construction and renovation.
- › Filler piece provides compensation and enables rational production.
- › The threshold holder produces a stable connection between the threshold and frame.
- › Aluminium cover enables flush installation and permits assembly of common locking points.

GUTMANN WESER 20 TI

- › Height 20 mm.
- › Improved thermal insulation thanks to thermal separation with PVC-free plastic profile.
- › Fulfilled highest watertightness up to 1350 Pa.
- › Side threshold holder.
- › Substructure insulation profile.
- › Strike plates from the GUTMANN standard range („Premium quality“).
- › Cover in PVC-free plastic further enhances the insulation values.
- › Processing is made significantly easier by side filler piece (no coping required).